



**RoHS
COMPLIANT**




FRONT VIEW

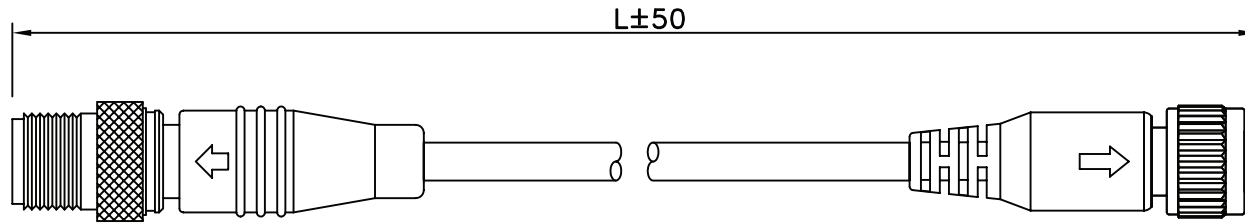

M12-4PIN MALE
MOLDED BLACK

M12-4PIN FEMALE
MOLDED BLACK



FRONT VIEW

Construction:

1. Cable: No UL (4 wires/AWG22) O.D. 5,2mm, black PVC jacket
2. Connectores: one side M124MS1, other side MS124Fs1
3. Overmolding: PVC 45P Black
4. Test: CT = 2Ω / IS = 5MΩ / Current = 4A / Voltage = max. 250V
5. Packing: individually packed in poly bag

PIN OUT		
M12-4PIN MALE		M12-4PIN FEMALE
1	BROWN	1
2	WHITE	2
3	BLUE	3
4	BLACK	4

INELCO circon	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED	
	Dimension Range	Tolerance	UNIT	APPROVED	
	X.X	± 0.20	mm	Pardal	
	X.XX	± 0.15		SIZE	A3
X.XXX	± 0.10	1/1			
ANGLE	± 1°				
Material/Plated/Notes	NAME				
see note	M12 Assembly				
Tooling No.	PART NO.	CAM12-MFLLL			REV.
	DOC. NO.				A